THE BRNAULTBIGHT









- 1. Independent Front Wheel Springing.
- 2. Powerful double action hydraulic shock absorbers.
- 3. Wheel embellishers.
- 4. Powerful 3-bearing crankshaft engine.
- 5. Bonnet opening in one piece in a single movement (easy access to engine and battery).
- 6. Well protected and easily accessible battery (Fig. on left).
- 7. Direction indicators.
- 8. Two scuttle ventilators.
- 9. Double windscreen wipers.
- 10. Light steering.
- 11. Powerful braking.
- 12. Dimmer switch (Fig. on right).
- 13. Grouped instrument board complete with electric clock.
- 14. Pistol grip handbrake under dashboard (Fig. on right).



SALOON

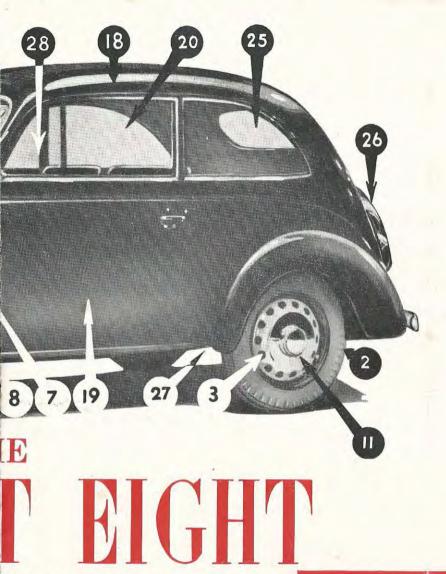






- 15. Electric horn.
- 16. Separate front seats, tipping and adjustable (Fig. on left).
- Scientific weight distribution for safety and comfort (Fig. on right).
- 18. All metal roof.
- 19. Extra wide doors giving easy access.
- 20. Safety glass in windscreens and all side windows.
- 21. Wing lamps.
- 22. Comfortable rear seats (Fig. on right).
- Rear seat and squab removable to enable the transport of goods, samples, etc. (Fig. on left).
- 24. Large rear luggage space for easy loading of essential luggage (Fig. on right).
- 25. Driver-controlled rear window blind.
- 26. Spare wheel (with metal cover).
- 27. Easy jacking sockets.
- 28. Anti-draught ventilating windows.

RICE £140



Independent front wheel springing ensures smooth ride over all surfaces.

SPECIFICATION

ENGINE GEAR BOX UNIT: Flexible rubber mounted 3-bearing crankshaft. Detachable aluminium cylinder head and sump. Side valves. BORE AND STROKE: 58 mm. × 95 mm., 1,003 c.c. TREASURY RATING: 8.3 h.p. (Tax £6 15s.). CARBURETTOR: Downdraught. LUBRICATION: By pump. Grease gun chassis lubrication. COOLING: Radiator thermosyphon. CLUTCH: Dry single disc. GEAR BOX: 3-speed synchromesh. Gear Ratios: 1st, 15; 2nd, 8.1; top, 5.1. Reverse, 19. TRANSMISSION: Enclosed

propeller shaft taking torque reaction and driving strain. STEERING: Worm and sector. SUSPENSION: Front and rear transverse springs (Front independent springing). Hydraulic shock absorbers. Panel disc wheels. Tyre sizes 4.75×16 . Spare wheel with metal cover. BRAKES: Internal expanding. PETROL SUPPLY: Rear tank, capacity 6 gallons. ELECTRICAL EQUIPMENT: 6-volt lighting and starting. Separate dynamo and starter.

INSTRUMENT BOARD: Comprising speedometer, clock, ammeter and petrol gauge. Signal indicators. DIMENSIONS: Wheelbase 7' $8\frac{1}{2}''$; Track 3' $9\frac{3}{4}''$; overall length, 12' 4''; total width, 4' 7''; total height, 4' 11''.

The powerful and cleanly designed engine has a 3-bearing crankshaft.

SALOON PRICE £140 RENAULT LIMITED

Works and Service Station: WESTERN AVENUE, ACTON, LONDON, W.3 (Acorn 4655)
West End Showrooms: 21 PALL MALL, LONDON, S.W.I (Whitehall 7270)

SERVICE: One of the most interesting departments at our Acton Works is that responsible for SPARE PARTS. Here a comprehensive stock is carried covering models of at least 10 years past. We are at all times glad to show interested customers the organisation of this important section.

Prices and Specifications subject to alteration without notice.

October, 1938.

